


Common Cathode LED Display



Jumper settings:	
	Buzzer, BUZ1: disabled C4H, default C4L
	DS1..DS4 enabled using C1L...C4L, default
	DS1 always enabled, DS2..DS3 using C2L...C4L
	DS1..DS4 enabled using C1H...C4H
	DS1 always enabled, DS2..DS3 using C2H...C4H
	DS1 always enabled, DS2..DS4 disabled
	DS1..DS4 disabled

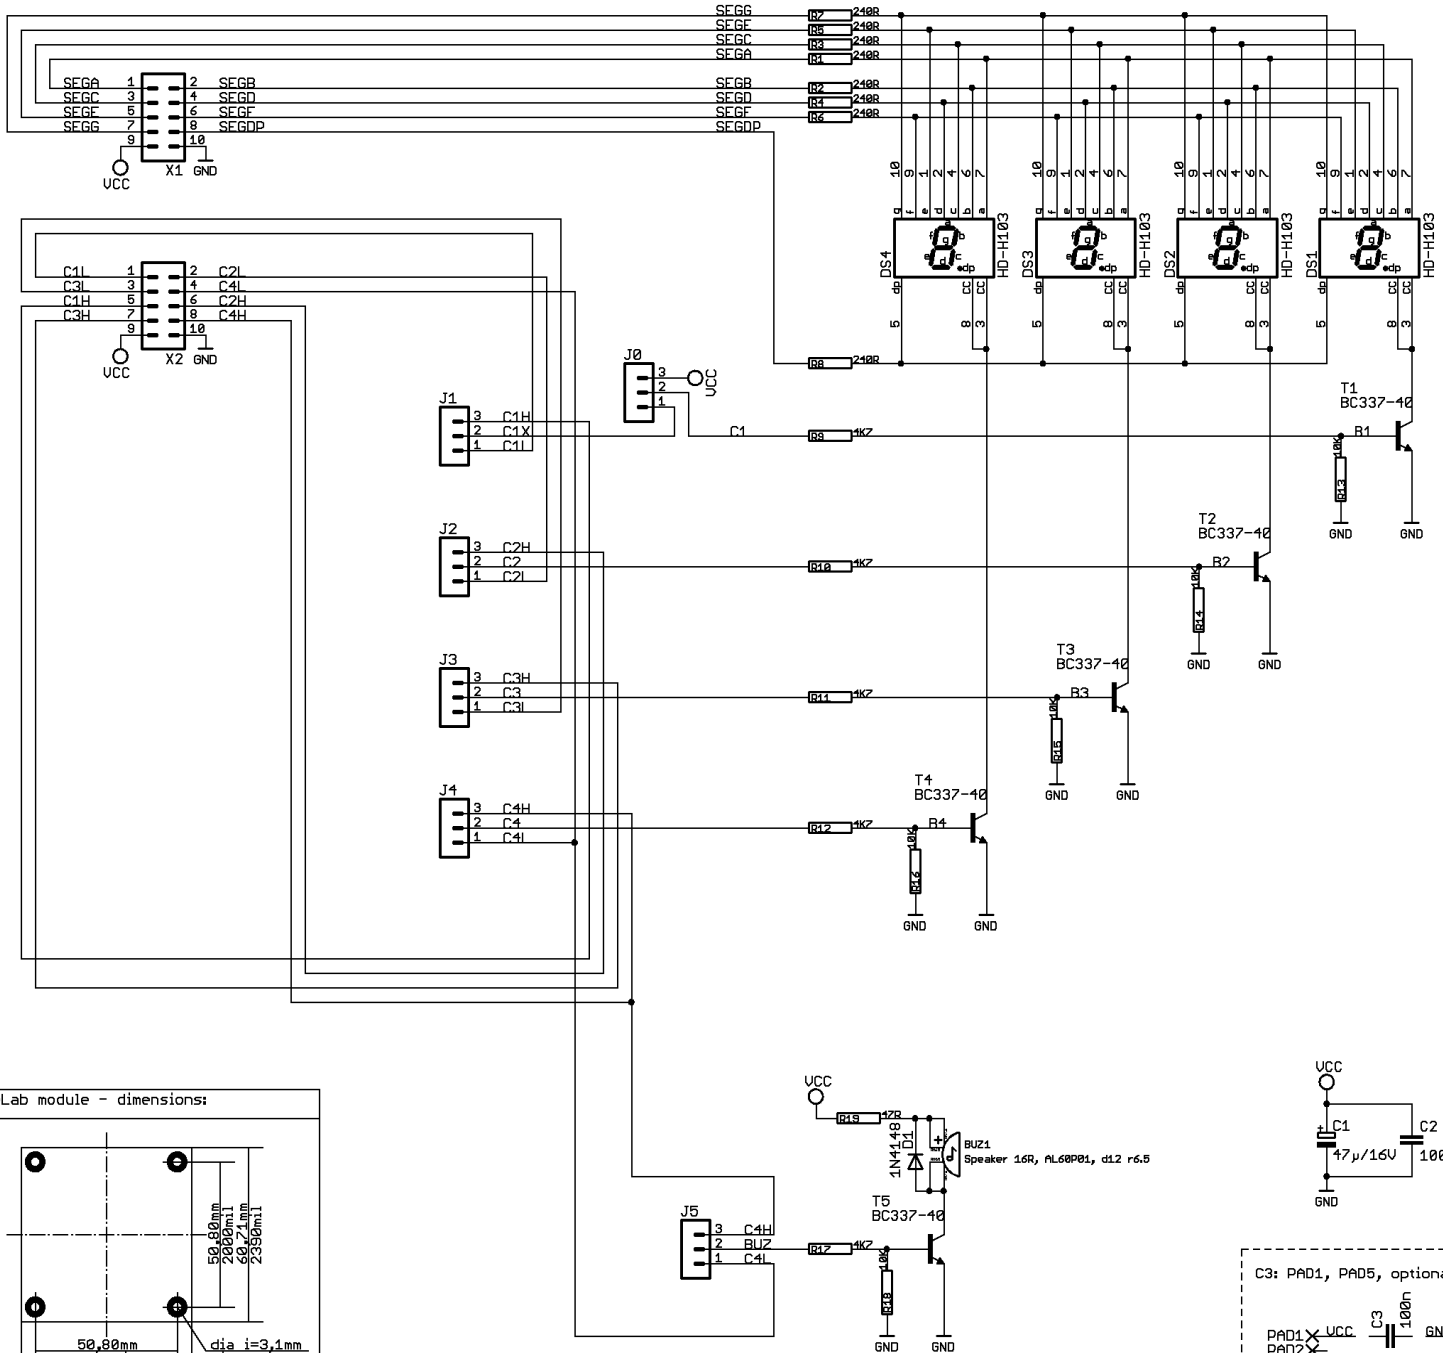